

G系列斜齿轮减速机


产品外形	2-2
型号标记	3-3
电机配置说明	4-4
安装位置	4-4
技术参数	5-11
安装尺寸	12-19

G Series Helical Gear Motor


Products Figure	2-2
Designation	3-3
Configuration of Electric Motor	4-4
Mounting Position	4-8
Technical Data	5-11
Mounting Dimensions	12-19




G..W

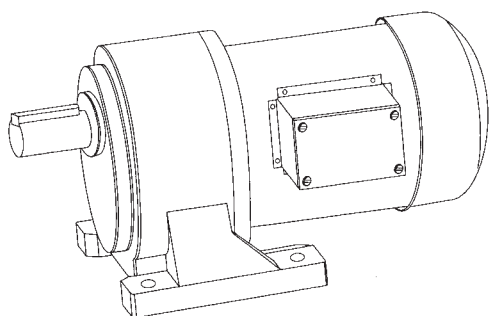


G..F

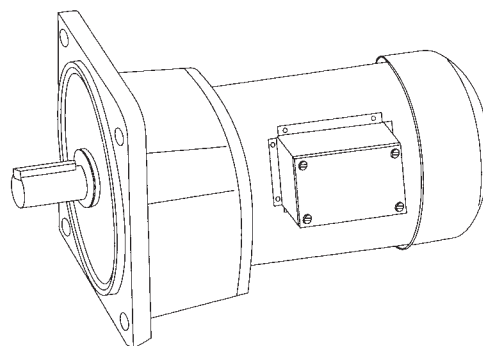


G..W..B5




G..F..B5



G..W..Z




G..F..Z



型号标记

Designation

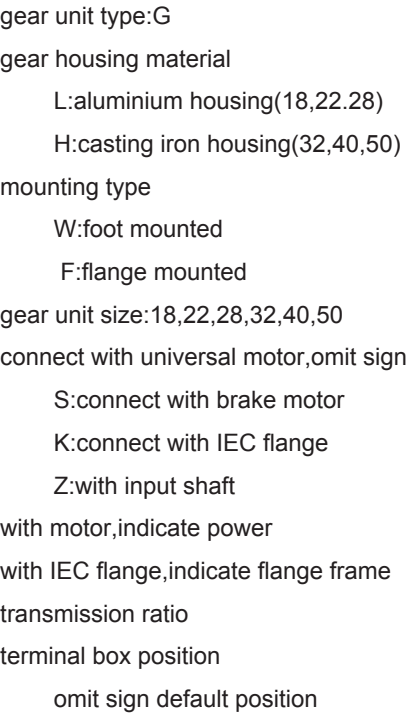

标记事例


- A GHW40Z-50
底脚安装,铸铁壳体,机型号40,传动比50
- B GLF28-550-50
法兰安装,铝合金壳体,机型号28,普通电机550W,传动比50,接线盒为默认位置180。
- C GLW28K-80B5-30
底脚安装,铝合金壳体,机型号28,IEC过渡法兰80B5,传动比30
- D GLF28S-550-50-0
法兰安装,铝合金壳体,机型号28,制动电机550W,传动比50,接线盒位置0°

sign Example

- A GHW40Z-50
foot-mounted,iron casting housing,gear unit size 40,with input shaft,transmission ratio 50
- B GLF28-550-50
flange-mounted,aluminium housing,gear unit size 28,with universal motor 550w,transmission ratio 50,terminal box position at default 180 degree.
- C GLW28K-80B5-30
flange-mounted,aluminium housing,gear unit size 28nwith IEC motor flange 80B5,transmission ratio 30.
- D GLF28S-550-50-0
flange-mounted,aluminium housing,gear unit size 28,with brake motor 550w, transmission ratio 50, terminal box position at 0 degree

接线盒位置

Terminal Box Position

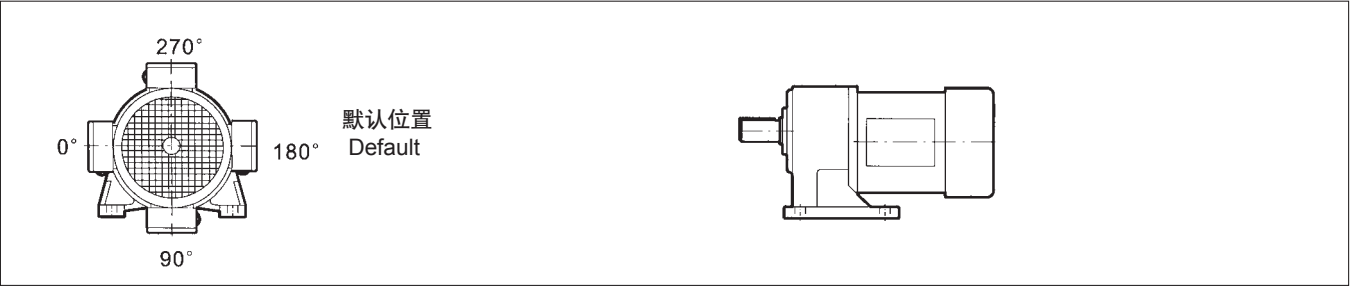

电机配置说明

Y系列三相异步电动机

- 1 本系列减速机标准配置Y系列普通三相异步感应电机；
- 2 电机电压：380V/50Hz；
- 3 电机防护等级IP54，绝缘等级F，B级温升；
- 4 环境温度不超过40℃，不低于-40℃；
- 5 连续工作制S1；
- 6 海拔高度不超过1000m；
- 7 冷却方式为C0141（风扇自冷）；
- 8 100及以下规格为“Y”接法，112M及以上规格为“△”接法；
- 9 优先选用4极电机；
- 10 电机技术参数见第189-194页

YEJ系列三相异步制动电机

- 1 三相异步制动电机为普通电机的基础上附加制动器；
- 2 电机电压：380V/50Hz；
- 3 制动器电压：规格71~100: DC99V
规格112~200: DC170V
- 4 配置单相AC220/50Hz整流器；
- 5 电机防护等级IP54，绝缘等级F，B级温升；
- 6 环境温度不超过40℃，不低于-40℃
- 7 连续工作制S1；
- 8 海拔高度不超过1000m；
- 9 冷却方式为C0141（风扇自冷）
- 10 100及以下规格为“Y”接法，112M及以上规格为“△”
- 11 优先选用4极电机；
- 12 电机技术参照数见第189-194页

特殊电机

- 1 选用包括防爆电机，变频电机，多速电机等特殊电机，本公司提供IEC标准电机法兰接口，接口尺寸见19页；
- 2 异频率，异电压电机，请联系本公司技术部；
- 3 使用环境温度不在-40~40℃ 范围内，请联系本公司技术部；
- 4 更高的绝缘等级及防护等级，请联系本公司技术部。

安装位置

- 1 本系列减速机采用全封闭，全寿命设计，采用齿轮合成润滑脂润滑，可以任意安位置装，定货时无须指明安装位置。

Configuration of Electric Motor

Y series Three-phase Asynchronous Brake Motor

- 1 this series gear unit configure three-phase asynchronous electric motor;
- 2 voltage:380V 50Hz;
- 3 protection class:IP54,insulation class:F temperature rising class:B;
- 4 ambient temperature:-15~40℃
- 5 continue working duty:S1;
- 6 altitude less than 1000m;
- 7 self-cooling with fan:C141;
- 8 within frame 100, follow connection Y, from frame 112, follow connection △;
- 9 first select 4 motor;
- 10 technical data on page 189-194.

YEJ series Three-phase Asynchronous Brake Motor

- 1 base on Y series motor, add a brake;
- 2 voltage:380V/50Hz;
- 3 brake voltage:frame:71~100 DC99V
frame:112~200 DC170V;
- 4 with single phase AC200V/50Hz rectifier;
- 5 protection class:IP54,insulation class:F,temperature rising class:B;
- 6 ambient temperature:-40~40℃;
- 7 continue working duty:S1;
- 8 ALTITUDE LESS THAN 1000m;
- 9 self-cooling with fan:C0141;
- 10 upon to frame 100, follow connection Y, from frame 112, follow connection △;
- 11 first select 4,6,8 poles motor;
- 12 technical data on page 189-194

Customized motor

- 1 others like explosion proof, inverter motor or multi-speed motor coupled by adaptor, the dimensions on page 19.
- 2 need different frequency and voltage, please contact us.
- 3 ambient temperature is out of -40~40℃, please contact us.
- 4 for higher insulation and protection class, please contact us.

Mounting positions

- 1 completely closed and long-time design for this series gear motor, lubricated by synthetic grease, needn't indicating the mounting position.

技术参数

Technical Data

符号意义

Key to Symbols



P ₁ =180W							
NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	Type	Gear unit	Motor size	 Kg
56	29	25	1200	GLW GLF	18	63M2-4	8.5
70	23	20	1100				
93	17	15	800				
140	12	10	550				
280	5.8	5	250				
467	3.5	3	200				
 	 	 	 	 	 	 	 

- 1 电机功率
- 2 输出转速
- 3 输出转矩
- 4 减速比
- 5 输出轴中最大点载荷
- 6 减速机类型
- 7 减速机规格
- 8 电机型号
- 9 大概重量

- 1 motor power
- 2 output speed
- 3 output torque
- 4 transmission ratio
- 5 maximum load on middle output shaft
- 6 gear unit type
- 7 gear unit type
- 8 motor frame
- 9 approximate weight

注意！
本系列减速机减速比与功率的匹配有所变动，新的设计建议按此技术参数选型

ATTENTION
some of the technical data updated,suggest customer selet the gear motor follow this version for new design.

技术参数

Technical Data

P ₁ =120W							
NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	Type	Gear unit	Motor size	 Kg
1.2	490	1200	10200	GHW GHF	32/22	63M1-4	23
1.6	490	900	7200				
1.9	490	750	5900				
2.3	432	600	5200				
3.1	230	450	4080	GLW GLF	28/18	63M1-4	12.5
3.7	230	375	3360				
4.7	216	300	2800				
7.0	137	200	3200	GLW GLF	22	63M1-4	8
8.8	122	160	2800				
12	91	120	2300				
14	76	100	1750				
18	61	80	1700.				
23	46	60	1650				
28	38	50	1600	GLW GLF	18	63M1-4	7.5
35	30	40	1500				
47	23	30	1350				
56	19	25	1200				
70	16	20	1050				
93	12	15	750				
140	7.8	10	500				
280	3.9	5	200				
467	2.3	3	180				

P ₁ =180W							
1.2	780	1200	15300	GHW GHF	40/28	63M2-4	28.3
1.6	780	900	11500				
1.9	780	750	9200				
2.3	648	600	7600				
3.1	486	450	7400	GHW GHF	32/22	63M2-4	23.5
3.7	405	375	6300				
4.7	324	300	5000				
7.0	228	200	2800	GLW GLF	28	63M2-4	11
8.8	183	160	2750				
12	137	120	2650				
14	114	100	5050				
14	114	100	1750	GLW GLF	22	63M2-4	8.5
18	91	80	1700				
23	69	60	1650				
28	57	50	1650				
35	46	40	1600				
47	34	30	1550				

技术参数

Technical Data

P₁=180W							
---------------------------	--	--	--	--	--	--	--

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	Type	Gear unit	Motor size	 Kg
56	29	25	1200	GLW GLF	18	63M2-4	8.5
70	23	20	1100				
93	17	15	800				
140	12	10	550				
280	5.8	5	250				
467	3.5	3	200				

P₁=250W							
---------------------------	--	--	--	--	--	--	--

1.2	1530	1200	20200	GHW GHF	50/32	71M1-4	60.5
1.6	1315	900	15100				
1.9	1100	750	12600				
2.3	900	600	9700				
3.1	675	450	7700	GHW GHF	40/28	71M1-4	28.8
3.7	563	375	7000				
4.7	450	300	5600				
7.0	317	200	5200	GHW GHF	32	71M1-4	21.5
8.8	254	160	5100				
12	190	120	4800				
14	159	100	4700				
14	159	100	5050	GLW GLF	28	71M1-4	11.5
18	127	80	4300				
23	95	60	3600				
28	79	50	3300				
35	63	40	2650				
47	48	30	2200				
56	40	25	1500	GLW GLF	22	71M1-4	11.5
70	32	20	1400				
93	24	15	1100				
140	16	10	800				
280	8.1	5	400				
467	4.9	3	300				

P₁=370W							
---------------------------	--	--	--	--	--	--	--

1.2	1530	1200	20200	GHW GHF	50/32	71M2-4	62
1.6	1530	900	15100				
1.9	1511	750	12600				
2.3	1332	600	9700				
3.1	975	450	7700	GHW GHF	40/28	71M2-4	29.3
3.7	810	375	7000				
4.7	666	300	5600				

技术参数

Technical Data

P ₁ = 370W							
NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	Type	Gear unit	Motor size	 Kg
7.0	469	200	5200	GHW GHF	32	71M2-4	22
8.8	375	160	5100				
12	282	120	4800				
14	235	100	4700				
14	235	100	5050	GLW GLF	28	71M2-4	12
18	188	80	4300				
23	141	60	3600				
28	117	50	3300				
35	94	40	2650				
47	70	30	2200				
56	59	25	1500	GLW GLF	22	71M2-4	9.5
70	48	20	1400				
93	36	15	1100				
140	24	10	800				
280	12	5	400				
467	7.2	3	300				

P ₁ = 550W							
3.1	1485	450	18900	GHW GHF	50/32	80M1-4	64
3.7	1238	375	15800				
4.7	990	300	12600				
7.0	698	200	10500	GHW GHF	40	80M1-4	32.3
8.8	558	160	9500				
12	419	120	8400				
14	349	100	7500				
14	349	100	7500	GHW GHF	32	80M1-4	25
18	279	80	5950				
23	209	60	5600				
28	174	50	5000				
35	140	40	4250				
47	105	30	3500				
56	87	25	3200	GLW GL F	28	80M1-4	15
70	71	20	2600				
93	53	15	1950				
140	36	10	1700				
280	18	5	880				
467	11	3	700				

技术参数

Technical Data

P₁=750W							
NA rpm	M₂ Nm	i	Fr₂MAX[N]	Type	Gear unit	Motor size	 Kg
3.1	1530	450	18900	GHW GHF	50/32	80M2-4	65
3.7	1530	375	15800				
4.7	1350	300	12600				
7.0	951	200	10500	GHW GHF	40	80M2-4	28.3
8.8	761	160	9500				
12	571	120	8400				
14	476	100	7500				
14	476	100	7500	GHW GHF	32	80M2-4	26
18	381	80	5950				
23	285	60	5600				
28	238	50	5000				
35	190	40	4250				
47	143	30	3500				
56	119	25	3200	GLW GLF	28	80M2-4	16
70	97	20	2600				
93	73	15	1950				
140	49	10	1700				
280	24	5	880				
467	15	3	750				

P₁=1100W							
7.0	1395	200	9700	GHW GHF	50	90S-4	56
8.8	1116	160	9500				
12	837	120	9200				
14	698	100	9000				
14	698	100	11500	GHW GHF	40	90S-4	34.3
18	558	80	10100				
23	419	60	8800				
28	349	50	7500				
35	279	40	6300				
47	209	30	5200				
56	174	25	4100	GHW GHF	32	90S-4	32
70	143	20	4100				
93	107	15	3700				
140	71	10	2500				
280	36	5	1700				
467	21	3	1400				

技术参数

Technical Data

P ₁ = 1500W							
-------------------------------	--	--	--	--	--	--	--

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	Type	Gear unit	Motor size	 Kg
8.8	1522	160	9500	GHW GHF	50	90L-4	59
12	1142	120	9200		50	90L-4	59
14	951	100	9000				
14	951	100	11500	GHW GHF	40	90L-4	37.3
18	761	80	10100				
23	571	60	8800				
28	476	50	7500				
35	381	40	6300				
47	285	30	5200				
56	238	25	4100	GHW GHF	32	90L-4	35
70	194	20	4100				
93	146	15	3700				
140	97	10	2500				
280	49	5	1700				
467	29	3	1400				

P ₁ = 2200W							
-------------------------------	--	--	--	--	--	--	--

14	1395	100	8700	GHW GHF	50	100L1-4	62
18	1116	80	8500				
23	837	60	8200				
28	698	50	7800				
35	558	40	7350				
47	419	30	7100				
56	349	25	4100	GHW GHF	50	100L1-4	40.3
70	285	20	4100				
93	214	15	3700				
140	143	10	2500				
280	71	5	1700				
467	43	3	1400				

P ₁ = 3000W							
-------------------------------	--	--	--	--	--	--	--

18	1522	80	8500	GHW GHF	50	100L2-4	66
23	1142	60	8200				
28	951	50	7800				
35	761	40	7350				
47	571	30	7100				

技术参数

Technical Data

P₁=3000W							
----------------------------	--	--	--	--	--	--	--

NA rpm	M₂ Nm	i	Fr_{2MAX}[N]	Type	Gear unit	Motor size	 Kg
56	476	25	4100	GHW GHF	40	100L2-4	44.3
70	389	20	4100				
93	292	15	3700				
140	194	10	2500				
280	97	5	1700				
467	58	3	1400				


P₁=4000W							
----------------------------	--	--	--	--	--	--	--

56	634	25	9600	GHW GHF	50	112M-4	77
70	518	20	8100				
93	389	15	7200				
140	259	10	6400				
280	130	5	4300				
467	78	3	4300				


安装尺寸

Mounting dimensions

GLW18..

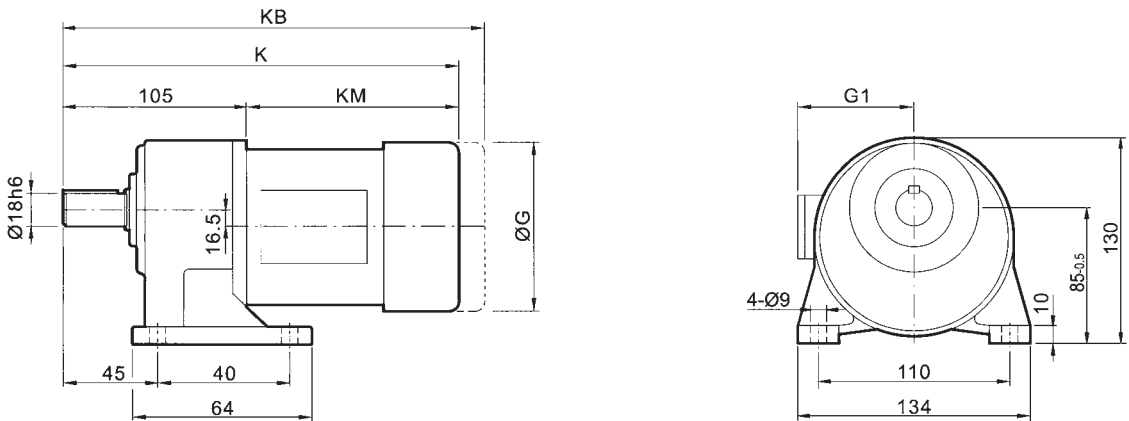

GLF18..

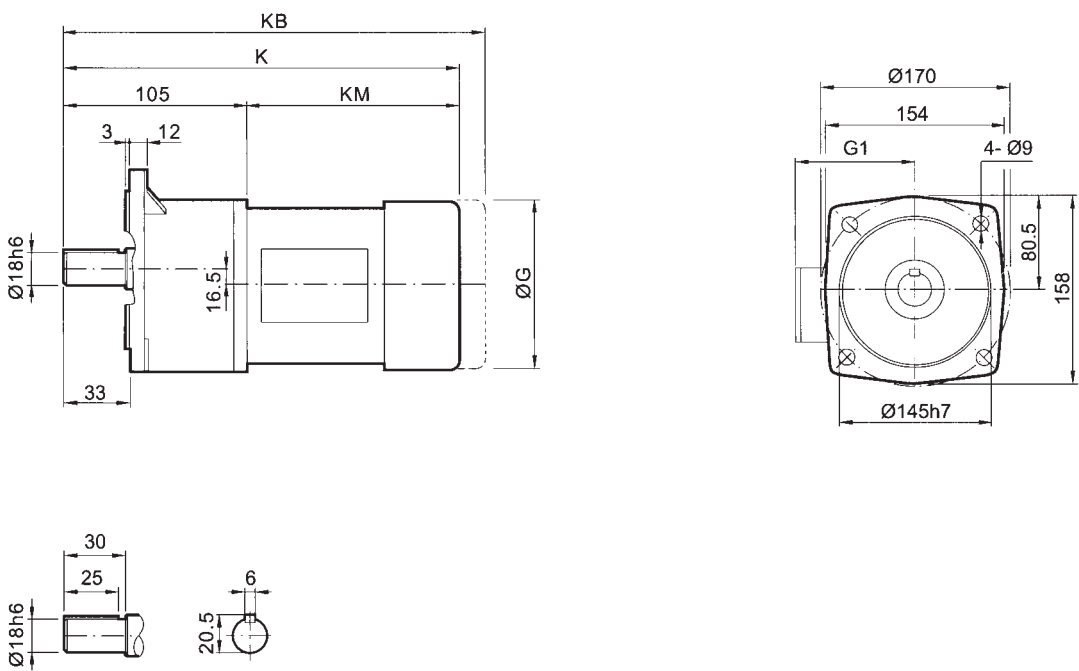

尺寸	电机规格	Motor frame									
Dimensions	63										
G	130										
G1	108										
K	307										
KB	383										
KM	202										


尺寸说明
以上尺寸为直联普通电机和制动电机尺寸；
KB为制动电机尺寸,其余为普通电机尺寸；
防爆电机,变频电机等需加过渡法兰,见19页。

ATTENTION
Dimensions of universa and brake motor shown in upon table,the others like expiosion,inverter motor coupled by adaptor,the dimension on page19.


安装尺寸

Mounting dimensions

GLW22..

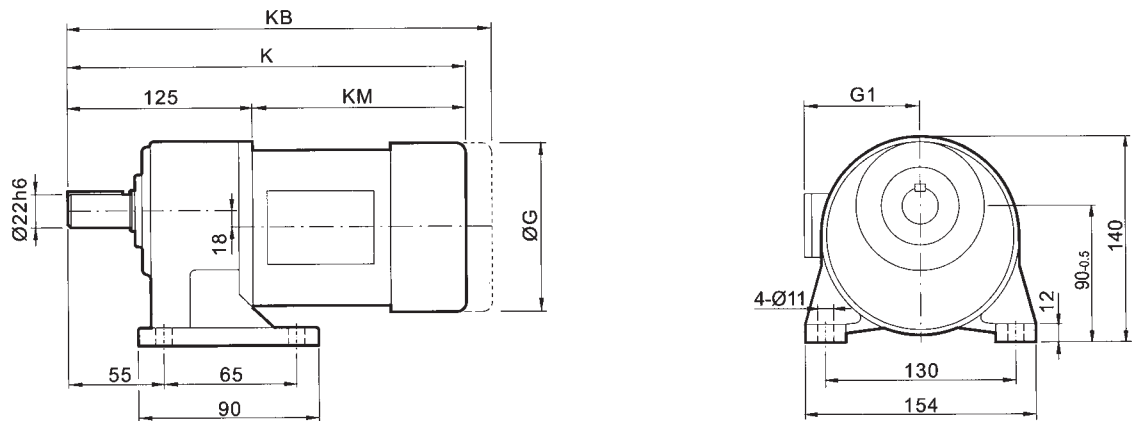

GLF22..

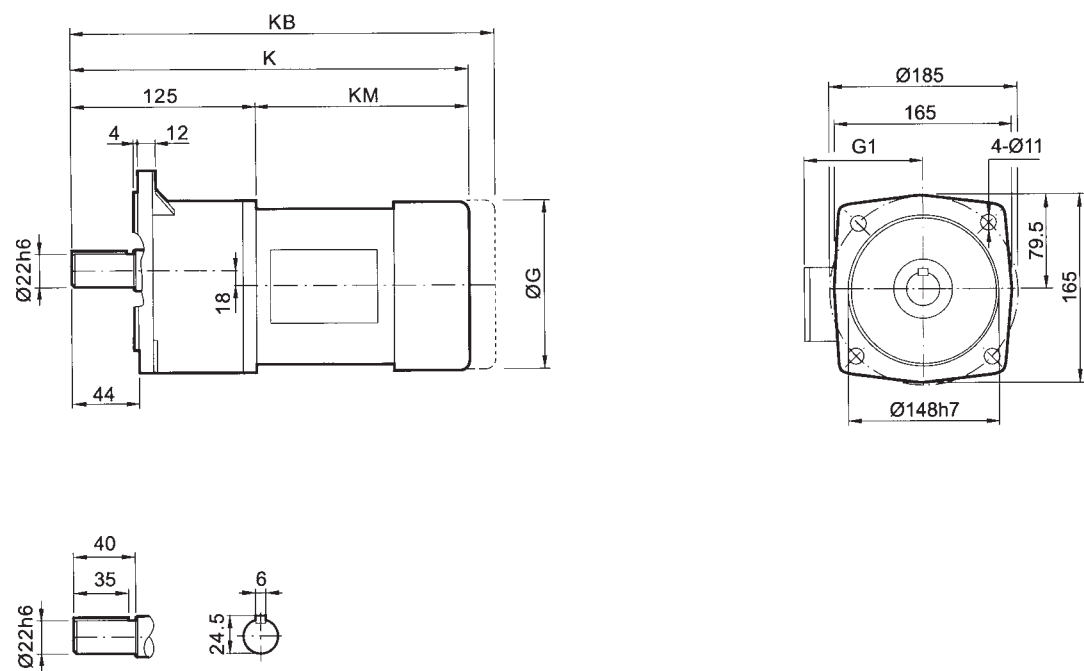

尺寸 Dimensions	电机规格		Motor frame							
	63	71								
G	130	145								
G1	108	110								
K	327	345								
KB	403	421								
KM	202	220								



尺寸说明
以上尺寸为直联普通电机和制动电机尺寸；
KB为制动电机尺寸，其余为普通电机尺寸；
防爆电机，变频电机等需加过渡法兰，见19页。

ATTENTION
Dimensions of universa and brake motor shown in upon table,the others like explosion,inverter motor coupled by adaptor,the dimension on page19.




安装尺寸

Mounting dimensions

GLW28..

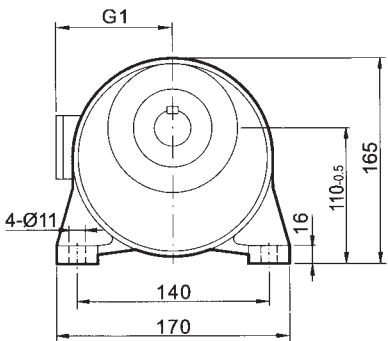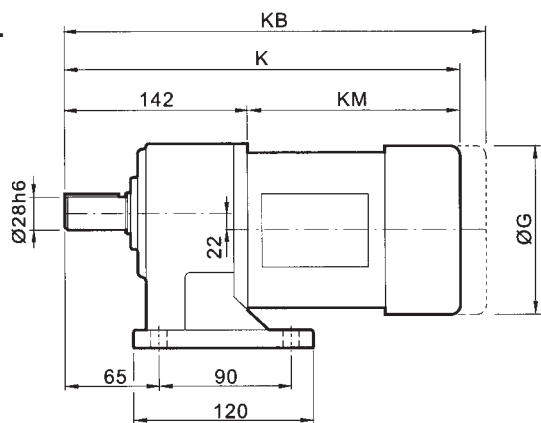

GLF28..

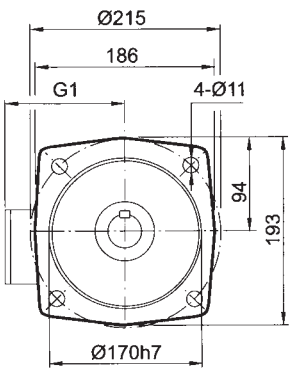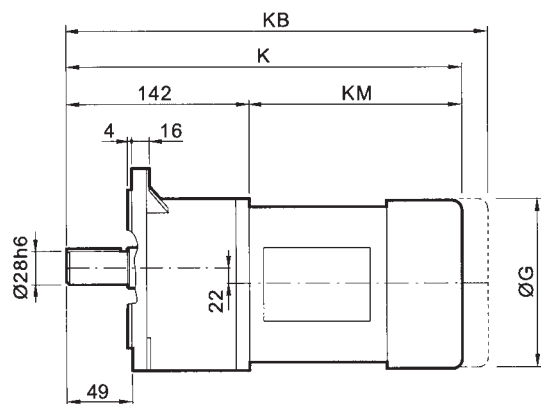

尺寸	电机规格			Motor frame							
Dimensions	63	71	80								
G	130	145	175								
G1	108	110	145								
K	344	362	397								
KB	420	438	472								
KM	202	220	255								


尺寸说明
以上尺寸为直联普通电机和制动电机尺寸；
KB为制动电机尺寸,其余为普通电机尺寸；
防爆电机,变频电机等需加过渡法兰,见19页。

ATTENTION
Dimensions of universa and brake motor shown in upon table,the others like explosion,inverter motor coupled by adaptor,the dimension on page19.


安装尺寸

Mounting dimensions

GHW32..

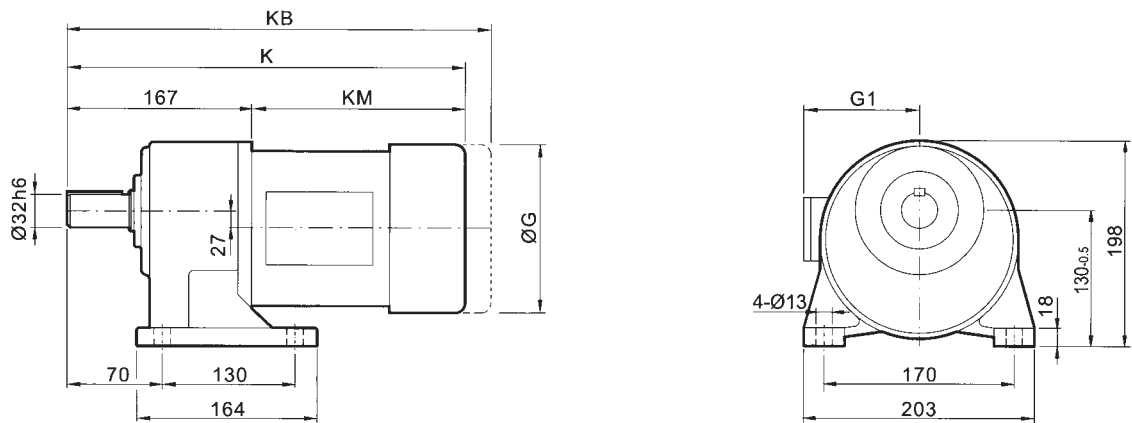

GHF32..

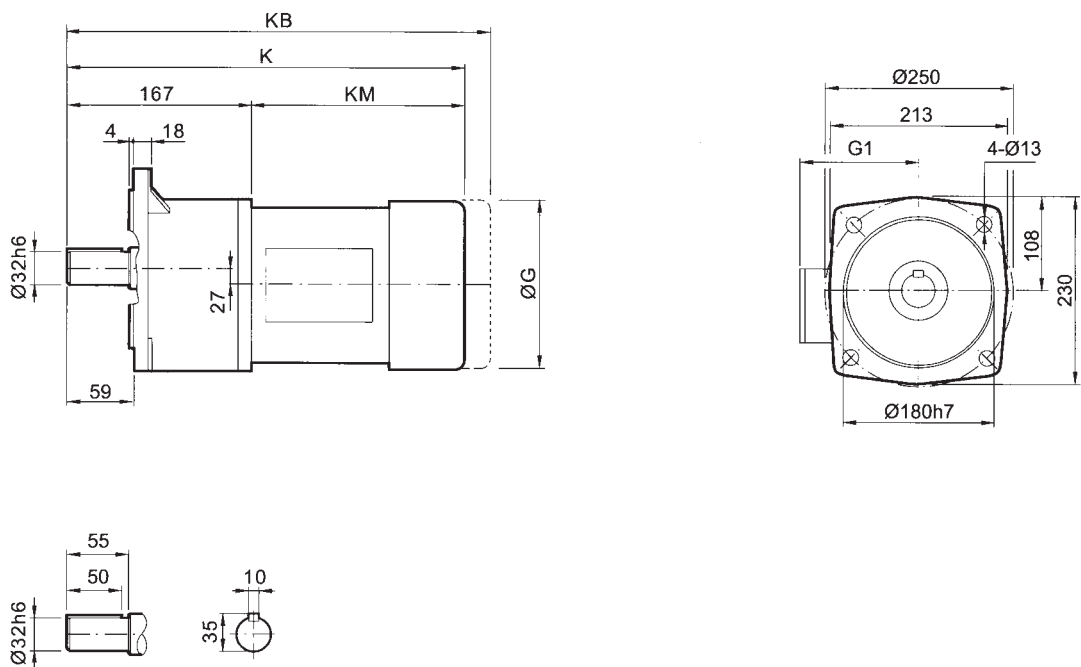

尺寸	电机规格			Motor frame							
Dimensions	71	80	90								
G	145	175	195								
G1	110	145	150								
K	387	422	432								
KB	462	497	511								
KM	220	255	265								

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸；
KB为制动电机尺寸,其余为普通电机尺寸；
防爆电机,变频电机等需加过渡法兰,见19页。


ATTENTION

Dimensions of universa and brake motor shown in upon table,the others like explosion,inverter motor coupled by adaptor,the dimension on page19.


安装尺寸

Mounting dimensions

GHW40..

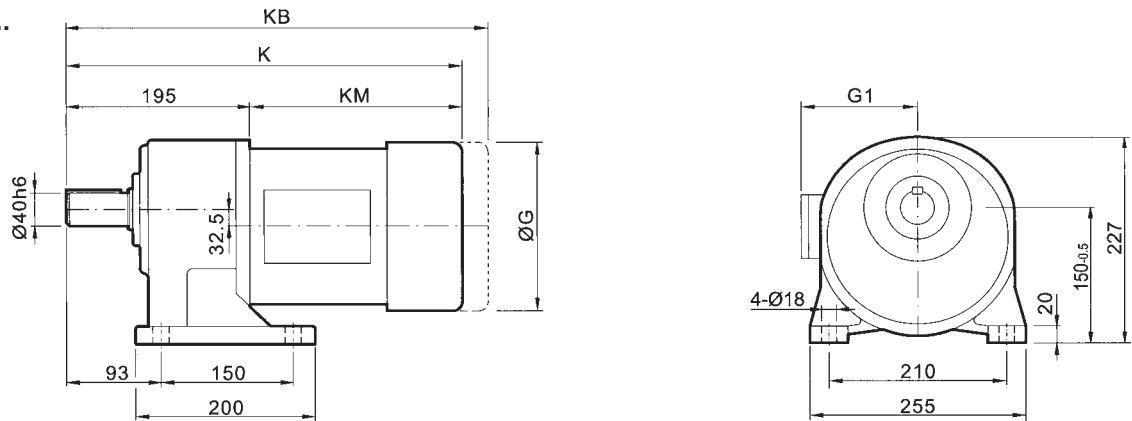

GHF40..

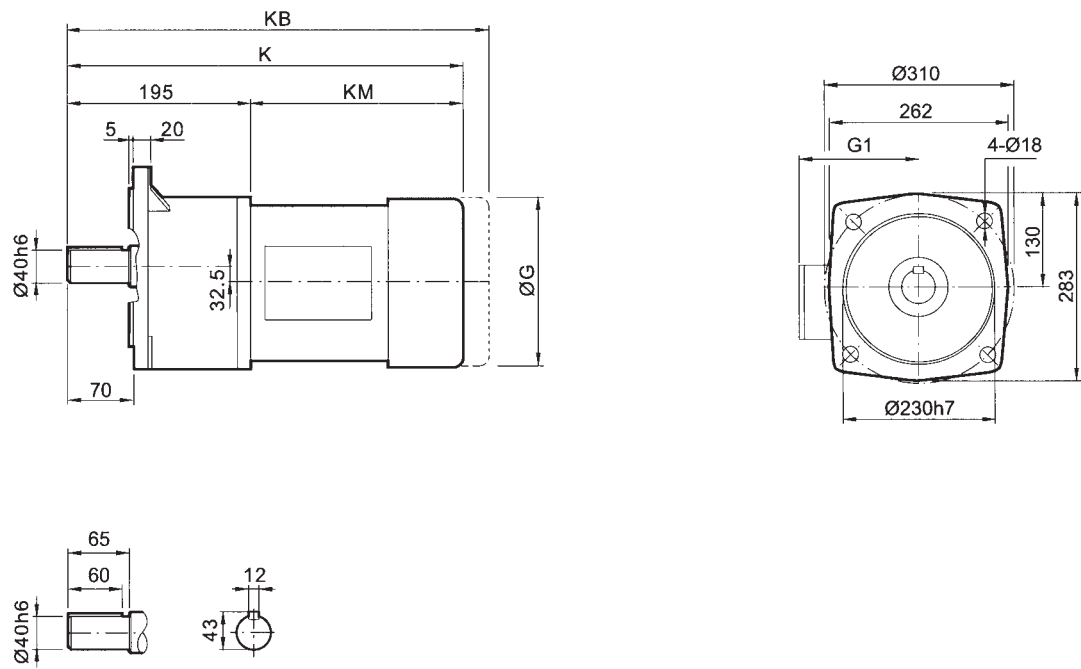

尺寸	电机规格				Motor frame						
Dimensions	80	90S	90L	100							
G	175	195	195	215							
G1	145	150	150	175							
K	460	460	485	520							
KB	537	584	609	633							
KM	265	265	290	325							


尺寸说明
以上尺寸为直联普通电机和制动电机尺寸；
KB为制动电机尺寸,其余为普通电机尺寸；
防爆电机,变频电机等需加过渡法兰,见19页。

ATTENTION
Dimensions of universa and brake motor shown in upon table,the others like explosion,inverter motor coupled by adaptor,the dimension on page19.


安装尺寸

Mounting dimensions

GHW50..

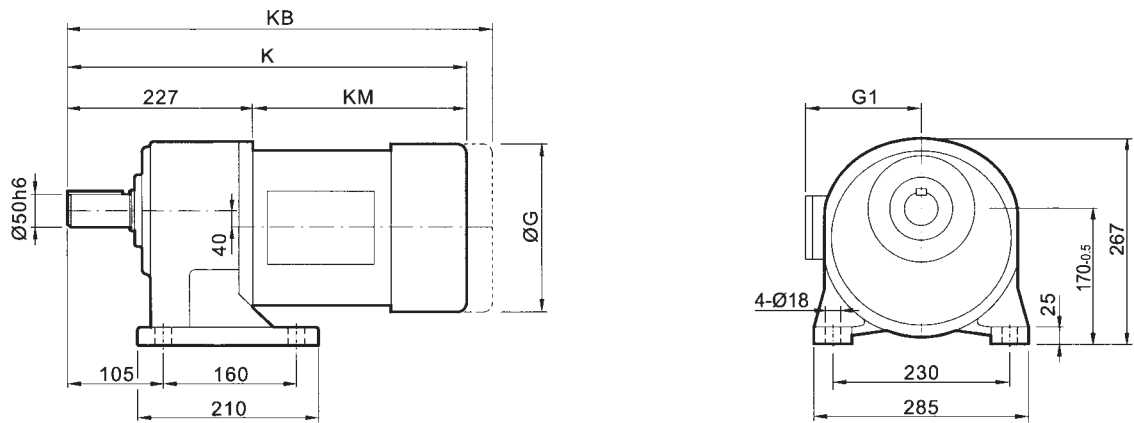

GHF 50..

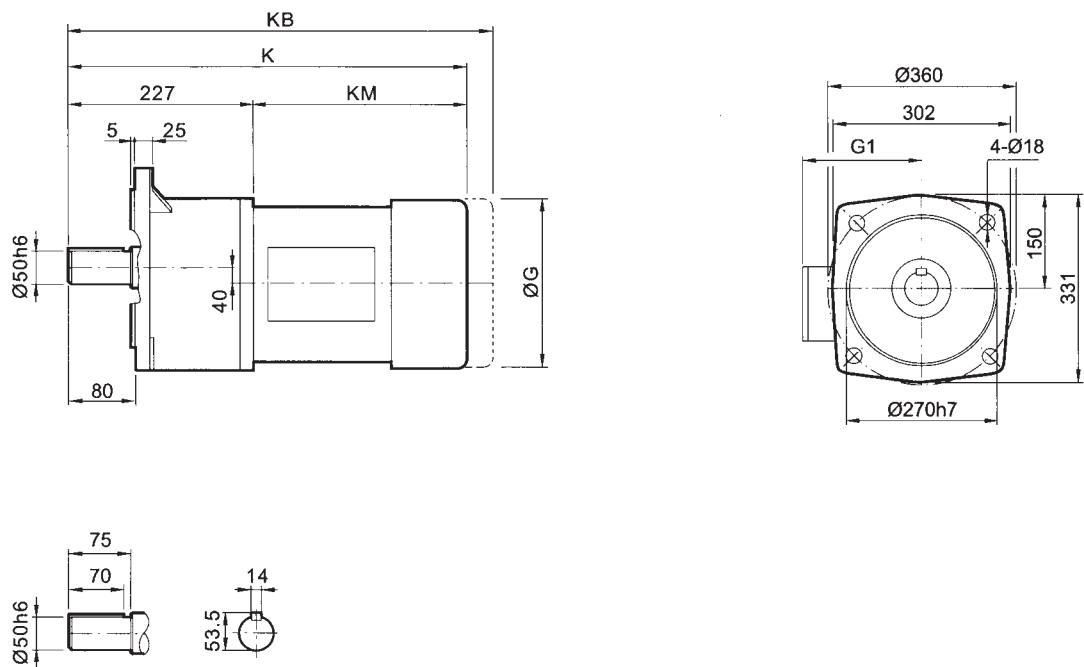

尺寸	电机规格				Motor frame						
Dimensions	90S	90L	100L	112M							
G	195	195	215	240							
G1	150	150	175	185							
K	492	507	552	567							
KB	616	631	665	687							
KM	265	280	325	340							

尺寸说明


以上尺寸为直联普通电机和制动电机尺寸；
KB为制动电机尺寸，其余为普通电机尺寸；
防爆电机，变频电机等需加过渡法兰，见19页。

ATTENTION

Dimensions of universa and brake motor shown in upon table,the others like explosion,inverter motor coupled by adaptor,the dimension on page19.

安装尺寸

组合型尺寸

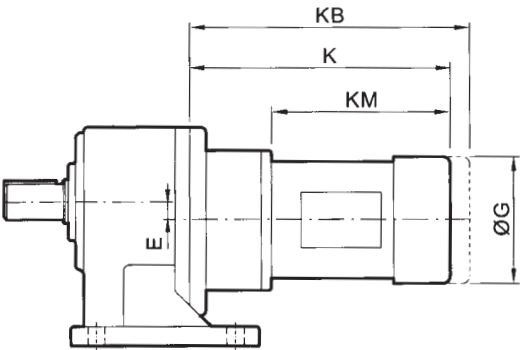

Mounting dimensions

Combinations

减速机规格 Gear unit size	电机规格 Motor frame	G	K	KB	KM	E
G..28/18	63..	130	277	353	202	38.5
G..32/22	63..	130	287	363	202	45
	71..	145	305	381	220	45
G..40/28	63..	132	309	375	202	54.5
	71..	145	317	393	220	54.5
G..50/32	80..	175	367	442	265	67

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸；
KB为制动电机尺寸,其余为普通电机尺寸；
防爆电机,变频电机等需加过渡法兰,见19页。

ATTENTION

Dimensions of universa and brake motor shown in upon table,the others like explosion,inverter motor coupled by adaptor,the dimension on page19.


安装尺寸

Mounting dimensions

输入轴尺寸

With input shaft dimensions

G..Z..

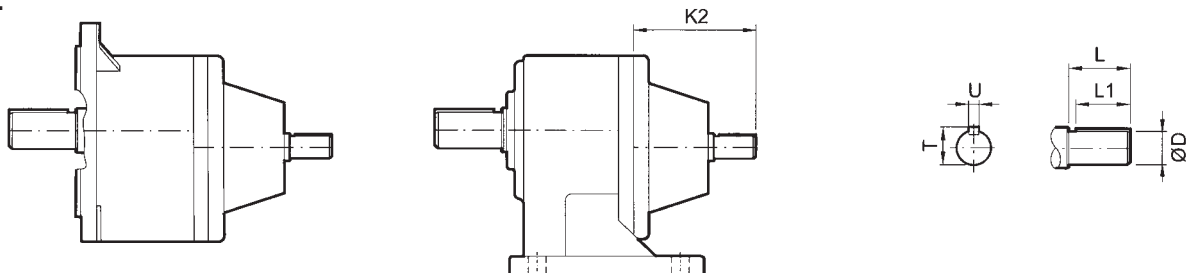


减速机规格 Gear unit size	D	L1	L	U	T	K2
G..18	14	22	25	5	16	66
G..22	14	22	25	5	16	66
G..28	16	25	30	5	18	79
G..32	19	25	30	6	21.5	86.5
G..40	24	30	35	8	27	109.5
G..50	35	45	50	10	38	125

输入法兰尺寸

With input flange dimensions

G..K..

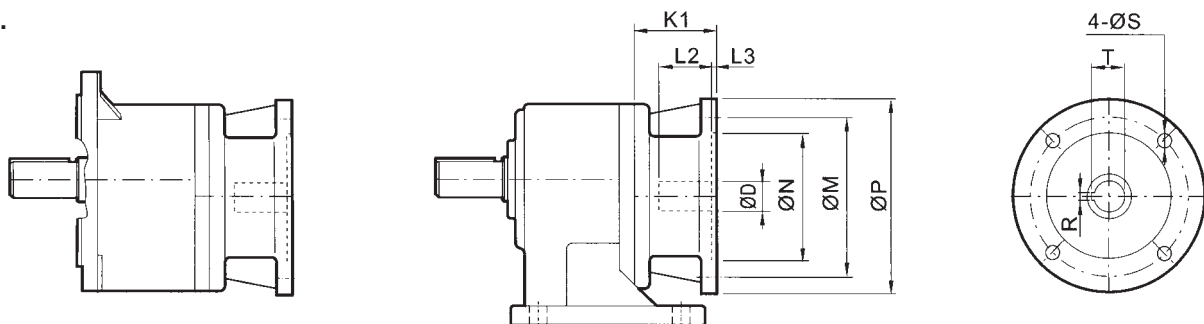

减速机型号 Gear unit size	电机规格 Motor frame	D	N	M	P	K1	L2	L3	R	T	S
G..18	63B5	11	95	115	140	45	23	4	4	12.8	10
G..22	63B5	11	95	115	140	45	23	4	4	12.8	10
	71B5	14	110	130	160	55	30	4.5	5	16.3	10
G..28	63B5	11	95	115	140	45	23	4	4	12.8	10
	71B5	14	110	130	160	55	30	4.5	5	16.3	10
	80B5	19	130	165	200	58.5	40	4.5	6	21.8	12
G..32	71B5	14	110	130	160	55	30	4.5	5	16.3	10
	80B5	19	130	165	200	75	30	4.5	6	21.8	12
	90B5	24	130	165	200	75	40	4.5	8	27.3	12
G..40	80B5	19	110	165	200	75	30	4.5	6	21.8	12
	90B5	24	130	165	200	75	40	4.5	8	27.3	12
	100B5	28	180	215	250	80.5	60	5	8	31.3	15
G..50	90B5	24	130	165	200	75	40	4.5	8	27.3	12
	100B5	28	180	215	250	80.5	60	5	8	31.3	15
	112B5	28	180	215	250	80.5	60	5	8	31.3	15